




SECTIONAL STEPS

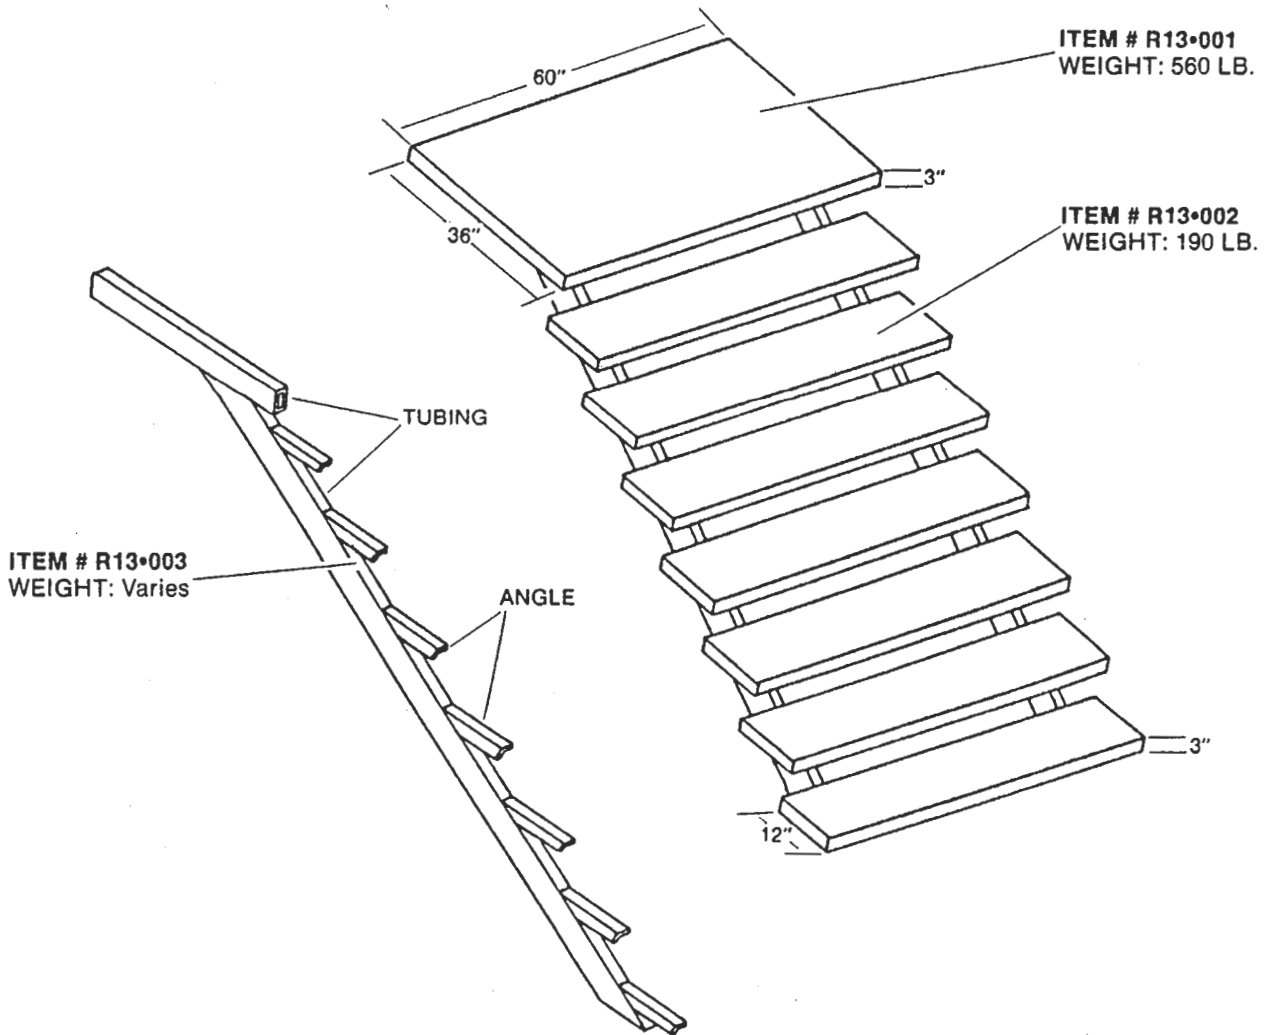

- SPECIFICATIONS:**
- 5000 PSI at 28 days
 - Reinforcing - as shown on page R14•2, Detail #2
 - Air entraining: 5-7%

- NOTES:**
- Steps to customer specifications
 - Frame (Item # R13•003) is constructed of - 2 x 4 x 1/4" tubing
- 2 x 2 x 1/4" angle
 - Dimpled finish (see Detail #2, Page R14•0)