






# PRECAST GRADE RINGS AND TAPERED CONE

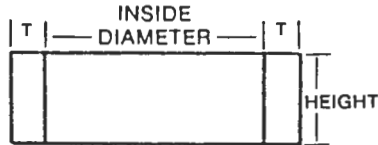

27" (675 mm) Inside Diameter  
GRADE RING

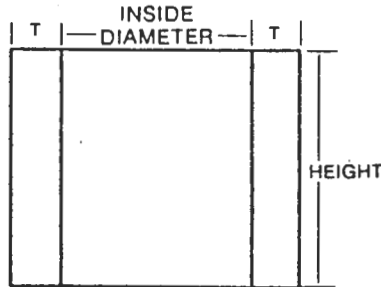

24" (600 mm) Inside Diameter  
GRADE RING

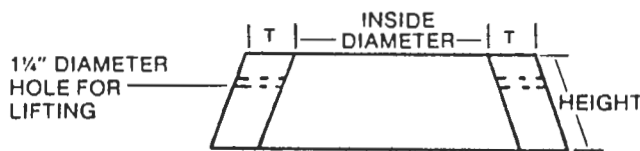

24" (600 mm) - 32" (800 mm)  
Inside Diameter  
TAPERED CONE

- SPECIFICATIONS:**
- 5000 PSI at 28 days
  - Air entraining: 5-7%
  - Reinforcing as per ASTM standard C-478

- NOTES:**
- Lift holes in 9"-30" Grade Ring (see page S9•0)